


NMC-PC2UD00D-XXX-C-GY
 NIKOMAX
 2 , .5, 2 110, LSZH, Direct,



(-)

NMC-PC2UD00D-XXX-C-GY 5,
 110

0,5 5

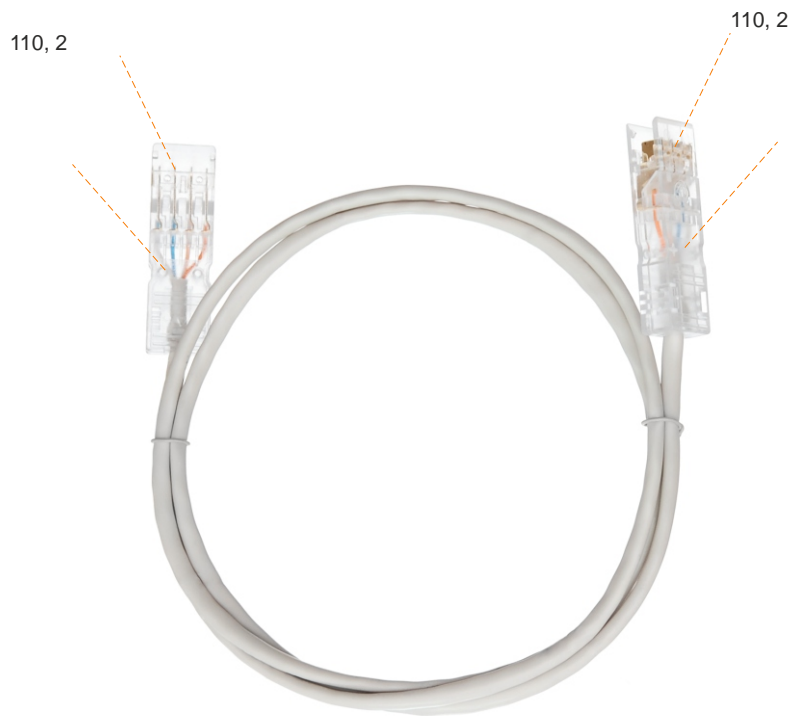

NMC-PC2UD00D-XXX-C-GY

1

- 110: NMC-CB110-50NL, NMC-CB110-100NL, NMC-CB110-50L, NMC-CB110-100L
- 110: NMC-RB110-100, NMC-RB110-200
- 110: NMC-CC110UD4-100, NMC-CC110UD5-100
- : NMC-OV500-2, NMC-OV900-2
- : NMC-OK400-2, NMC-OK600-2, NMC-OK800-2, NMC-OP450-2, NMC-OP700C

	NMC-PC2UD00D-XXX-C-GY
	2x110
	, 3-3
	Direct
	5
	100
	2
, AWG()	24 (7 0,186)
	(PE)
	0,95
	LSZH
	4,6
	-
	: ISO/IEC 11801, EN 50173, TIA/EIA 568
	10BASE-T, 100BASE-TX, 100BASE-T4, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	-20 +60. -20 +50
	1
	-

						3	
NMC-PC2UD00D-005-C-GY	5	2x110	Direct	0,5	0,000228	0,029	
NMC-PC2UD00D-010-C-GY	5	2x110	Direct	1	0,000285	0,035	
NMC-PC2UD00D-015-C-GY	5	2x110	Direct	1,5	0,000320	0,036	
NMC-PC2UD00D-020-C-GY	5	2x110	Direct	2	0,000355	0,037	
NMC-PC2UD00D-030-C-GY	5	2x110	Direct	3	0,000380	0,070	
NMC-PC2UD00D-050-C-GY	5	2x110	Direct	5	0,000570	0,110	

